



# DV45

## **Dual View Wheel Dumper**

The next level of the Dual View dumper

The cabin can be rotated when driving at the press of a button on the right joystick. The optional Multi View mode therefore provides the ability to work with a cabin turned to the side in order to have an overview to the side of the machine and the skip. At the press of a button, the cabin is automatically rotated, whereby the operator can concentrate on the primary work. Additional safety features round off the optimal overall package with a maximum payload of {4,200kg} {9,259lb}. The DV45 is simultaneously characterized with the familiar high level of comfort features, the very good stability, and the hydrostatic 4wheel drive with ECO mode.

#### Highlights

- Rotating cab
- Multi View Mode
- Automatic skip return
- Inclination monitoring
- Active Sense Control

#### Technical Data

Hydraulic		Cylinder	3.0
Operating pressure	240.0 bar	Cylinder capacity	1,663.0 cm3
Tank capacity	53.0	Inclined position max.	20.0 °
Mechanical - Output Details		Fuel type	Diesel EN 590
Travel speed	25.0 km/h	Tank capacity	53.0 I
Mechanical Details		Effective power	36.0 KW
Length	4,400.0 mm	Nominal Engine speed	2,300.0 1/min
Width	1,780.0 mm	Exhaust-gas limit	EU Stage V
Height	3,274.0 mm	Starter battery Voltage	12.0 V
Weight	4,114.00 kg	Manufacturer	Perkins
Weight cabin	4,640.0 kg	Engine designation	403J-E17T
Payload	4,200.0 kg	Environment Data	
skip	Swivel skip	Sound power LWA, guaranteed	98.0 dB(A)
Skip capacity levelled	1,810.0	Sound power LWA (Standard)	ISO 6395
Skip capacity heaped	2,400.0	Operating Fluids	
Skip capacity waterlevel	1,350.0	Fuel specification	Diesel EN 590
Pendulum angle	15.0 °	Fuel Tank capacity	55.0 l
Engine		Fuel Tank Volume	46.0
Cooling	Water-cooling	Chassis	
Motor type	Diesel engine	Turning radius	4,465.0 mm

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

2024-07-02


Articulation angle	36.0 °	tires
drive unit	Swash plate motor	Sh
hydraulikpump	Gear pump	Shipp
Operating pressure	240.0 bar	

### Shipping and Storage

Shipping weight

2,991.0 kg

#### Dimensions

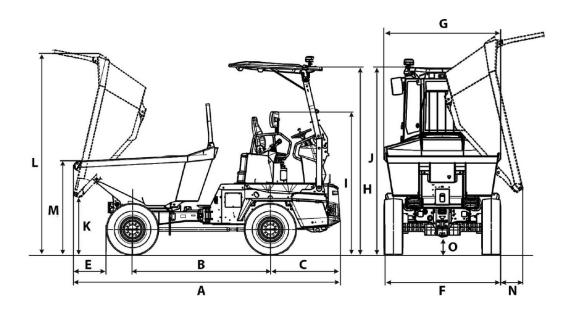

А	Total length	4,400 mm
В	Wheel base	2,280 mm
С	Rear overhang	1,155 mm
Е	Dumping width	503 mm
F	Width of vehicle	1,780 mm
G	Width of skip	1,775 mm
Н	Height ROPS	3,060 mm
1	Height of ROPS tilted	2,363 mm
J	Height with cab	2,841 mm
K	Dumping height max.	945 mm
L	Skip height tilted	3,317 mm
Μ	Skip height	1,634 mm
Ν	Dumping width lateral	335 mm

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.